

**THE PORT AUTHORITY OF NEW YORK AND NEW JERSEY
TWO MONTGOMERY STREET - 1st FLOOR
JERSEY CITY, NJ 07302**

May 25, 2018

ADDENDUM NO. 13

TO PROSPECTIVE BIDDERS ON CONTRACT **EWR-154.395** – NEWARK LIBERTY INTERNATIONAL AIRPORT – TERMINAL A REDEVELOPMENT PROGRAM BRIDGES N61, N62, N63, AT-GRADE ROADWAYS AND APPURTENANCES AND CONTRACT **EWR-154.395M** – NEWARK LIBERTY INTERNATIONAL AIRPORT – AGREEMENT TO PERFORM LANDSCAPE MAINTENANCE

The following changes are hereby made in the Contract Documents for the subject Contract.

This communication should be physically annexed to back cover of the book and initialed by each bidder before submitting his bid.

In case any bidder fails to conform to these instructions, his Bid will nevertheless be construed as though this communication had been so physically annexed and initialed.

CHANGES IN THE CONTRACT DRAWINGS


- Dwg. E1202 - Delete the text of Note 4 in its entirety and substitute therefor "FURNISH AND INSTALL A LOAD CENTER WITH RISER BASE. CABINET SHALL HAVE STAINLESS STEEL BACK PANEL, NEMA 3R RATED AND MADE FROM 11 GA (0.120") STAINLESS STEEL. LOAD CENTER SHALL HAVE SLAM LOCK WITH CORBIN #2 KEY. METER CABINET SHALL HAVE "POLICE SLAM LATCH" WITH SKELETON KEY. SUBMIT MANUFACTURER'S SHOP DRAWING FOR THE CABINETS TO THE ENGINEER FOR APPROVAL."
- Dwg. ES0405 - Make the following changes:
- A. Delete the text of Note 1 in its entirety and substitute therefor "EQUIPMENT CABINETS SHALL BE A FREE-STANDING, MINIMUM 11 GA (0.120") STAINLESS STEEL CABINET WITH INTERNAL 19" EQUIPMENT RACKS."
 - B. Revise the drawing as shown in Sketch SK-ES01 which is attached hereto and made a part hereof.

Dwg. ITS0301 - Delete the text of Note 1 in its entirety and substitute therefor "THE CONTROLLER CABINET SHALL BE A FREE STANDING DOUBLE DOOR, VENTED, NEMA 3R, 11 GA (0.120") STAINLESS STEEL CABINET WITH TWO INTERNAL 19-INCH EQUIPMENT RACKS THAT STAND AT LEAST 5'-6" HIGH."

THE PORT AUTHORITY OF NEW YORK AND NEW JERSEY

James Starace, P.E.
Chief Engineer/Director

INITIALLED BY THE BIDDER:

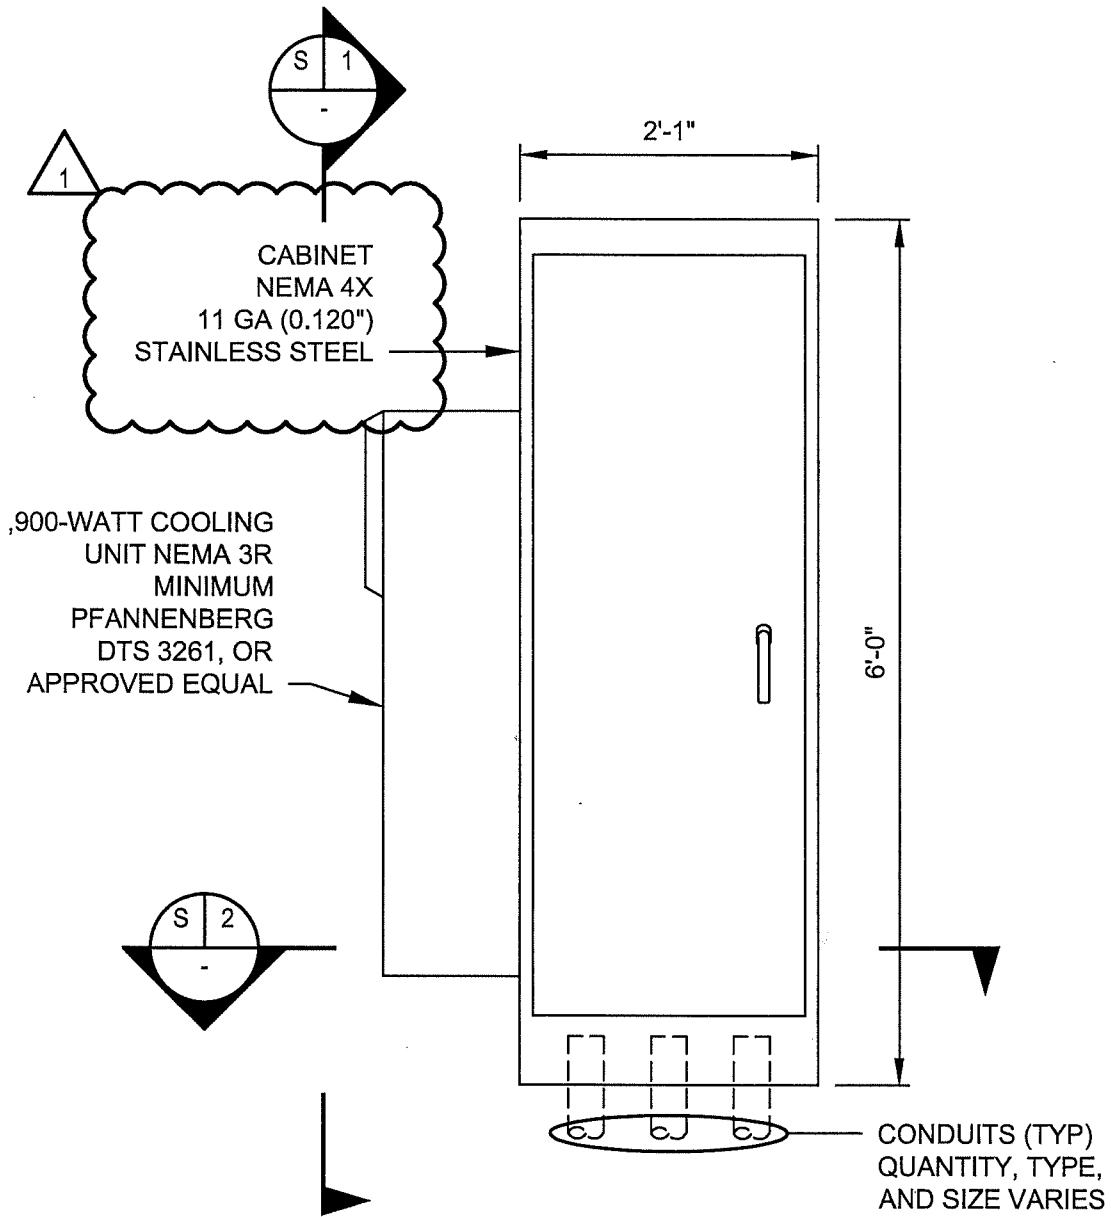

(E 1) FRONT ELEVATION

SKETCH SK-ES01
 ADDENDUM NO. 13