



World Trade Center Construction Fact Sheets

February 2011

Rebuilding the Future

The new World Trade Center embodies a bold vision: to remember, renew, and rebuild the future.

With One World Trade Center, the National September 11 Memorial & Museum, a state-of-the-art Transportation Hub, Vehicular Security Center, and more, the new site represents the triumph of the human spirit.

The new World Trade Center is destined to become, once again, the world's premier destination for commerce, culture and community.



PROJECT PARTICULARS

- Steel erection commenced on September 2, 2008, with the erection of a 7,700 pound column located near the footprint of the original World Trade Center's North Tower.
- A 65-foot-high by 62-foot-wide piece of the original foundation wall, or slurry wall, is being preserved to allow visitors of the Memorial Museum to view it. A reinforcing wall was built behind this section to ensure the slurry wall's integrity.
- A total of 65,000 cubic yards of concrete, coupled with 8,658 tons of steel, are being used to build the Memorial.
- The design for the Memorial was conceived by architect Michael Arad and landscape architect Peter Walker. More than 5,200 entrants from 63 nations completed in the Memorial Design Competition.

9/11 Memorial

The National September 11 Memorial & Museum at the World Trade Center will memorialize the victims of the September 11, 2001 attacks, a national tragedy that changed the course of history. Visitors will be able to learn, remember and pay tribute to those who lost their lives in New York, NY; Shanksville, PA; and Washington, D.C., as well as the World Trade Center bombing in 1993.

"Reflecting Absence," the Memorial, will consist of two massive voids sized over the footprints of the original Twin Towers with waterfalls cascading down their sides. The names of those who perished as a result of the attacks will be inscribed around the edges of the Memorial waterfalls. The Memorial Plaza will serve as a contemplative space amid the cacophony of sights and sounds of Lower Manhattan. A state-of-the-art museum, featuring interactive exhibitions, artifacts, memorabilia, a resource center, and areas for reflection will complement the Memorial.

MONTHLY HIGHLIGHTS

The grand staircase, which will take visitors from the Pavilion structure to the below-grade Museum is nearly complete. Also this month, the bronze name parapet installation continues to progress surrounding the North Pool.

CONSTRUCTION PROGRESS

Plaza

Installation of tree louvered retaining walls is starting in area 3C of the plaza in preparation for soil deliveries. The irrigation contractor continues to install piping at the plaza in various phases.

Pavilion

The structural steel contractor is installing the grand stairs, which will take visitors inside the Museum. The concrete reinforcing and placement of core walls has started. Currently, reinforcing steel installation has started for the 2nd floor slab. The electrical contractor is currently installing conduits and back boxes into the 2nd floor slab. Steel detailing and metal deck installation is continuing at the Pavilion roof level.

North Quadrant

The bronze name parapet installation has moved to the south area of the North Pool. The fountain weir stone installation is also progressing. Piping for the sophisticated bronze parapet heating and cooling system is being installed.

South Quadrant

The installation of 16" fiberglass pipe for the South Pool is nearly complete and work continues for fountain piping in the south pump room. Permanent light fixtures continue to be installed at the south corridors, with additional deliveries of light fixtures ongoing.



SPECIAL FEATURES

- Spread over 8 acres, accented with over 400 Swamp White Oak trees; with each tree, planter, and associated soil weighing 37,000 pounds. The Swamp White Oak trees, reaching heights of up to 60 feet, are exceptionally long-lived trees, living up to 300 years. Fall colors provided by these trees will include ranges of copper, red, yellow, orange, and purple.
- The reflecting pools and perimeter waterfalls are being constructed over the footprints of the original World Trade Center Twin Towers.
- Exhibition space and a visitors' center will be housed above-grade in the Pavilion. Visitors to the expansive below-grade museum galleries will experience part of what previously stood; open views of the original slurry wall and the supporting bedrock sub strata.

Fun Facts

The weight of the trees to be used in the plaza to complement the Memorial and Museum bring an equivalent total weight equal to about 30 times the weight of the Statue of Liberty.

Want something to chew on? The American Sweet Gum trees bring a little of history to the project. Early pioneers scraped resin from the trees and used it for chewing gum.

PROJECT PARTICULARS

- Base Shape and Dimensions: cubic, measuring 200 feet by 200 feet
- Below Grade Footprint: 42,000 square feet
- Pedestrian access from Vesey, Fulton and West Street at grade and from Transportation Hub East-West Corridor below grade
- 104 floors
- Office Space: 2,600,000 square feet
- Structural Steel: Approximately 45,000 tons
- Concrete: 200,000 cubic yards
- The 187-foot-high base will be clad in over 2,000 pieces of prismatic glass
- Lobby Height: 50 feet (Part of Building Base)
- 9 Escalators and Elevators: 44 high-rise passenger, 10 high-rise shuttle, 5 high-rise service, 5 high rise express to Restaurant and Observation Deck, and 6 low rise
- Tower Height (with spire): 1,776 feet (408 ft. spire atop 1368 ft. tower)
- Original Twin Towers: WTC 1 at 1,727 feet above grade (with antenna) and WTC 2 at 1,362 feet above grade (both 110 floors)
- Exterior cladding will be composed of 1,000,000 square feet of glass
- The U.S. General Services Administration and New York State Office of General Services have lease commitments for more than a million sq. ft.; coupled with the recent signing of Vantone Industry Co., to 190,810 square feet, the Tower has now reached 50% occupancy

One World Trade Center

Soon to become New York City's tallest skyscraper, One World Trade Center was designed by architect David Childs. One World Trade Center features 3,500,000 square feet of space, composed of offices, an observation deck, world-class restaurants, parking, and broadcast and antennae facilities – all supported by above and below-grade mechanical infrastructure for the building and its adjacent public spaces. Below-grade tenant parking and storage, shopping and dining options, along with access to the PATH and subway trains and the World Financial Center are also provided.

MONTHLY HIGHLIGHTS

Steel erection is complete to the 56th floor, over halfway to the top of the tower. The concrete core is following closely behind and installation of the building's curtain wall has begun, forming the iconic skin of One World Trade Center as it clearly establishes its prominent position in the New York City skyline.

CONSTRUCTION PROGRESS

Superstructure Steel

Structural steel erection continues at floors 55 and 56. All perimeter columns for this tier are erected. The cocoon system has been jumped to the 56th floor at all elevations.

Superstructure Concrete

The north core shear walls are cast to the 47th floor. Internal floor slabs within the core shear walls are cast to the 42nd floor. Concrete was placed for the intermediate shaft walls within internal cell #4 at the north core between the ground and second floors. Lathers continue to place reinforcement for segments of the wall surrounding the lobby area at the base of the podium.

Building Enclosure

Infill of the northwest corner leave-out area below the slider crane continues between floors 20 and 25. Curtain wall erector Benson has set corner units at floors 20 and 21. Infill of the typical flat aluminum and glass panels has progressed to the 21st floor. Notwithstanding the northwest corner, the tower enclosure system is complete to the 25th floor at all elevations. Benson continues to install the louver system at the inboard perimeter of the podium mechanical spaces. Framing is complete and installation of louver panels is progressing at the north and east elevations at floors 4 and 5M.

Podium enclosure system erector Solera/DCM are installing anchors at the exterior face of the spandrel beams at the east and west elevations of the podium.



SPECIAL SECURITY FEATURES

- Structural redundancy, enhanced fireproofing, and extra-wide pressurized stairs
- Concrete-protected sprinklers, emergency risers and communication systems
- Interconnected redundant exits
- Enhanced emergency communication cabling
- Dedicated stairs for use by firefighters
- Elevators are housed in a protected central building core and a protected tenant collection point located on each floor

Fun Fact

One World Trade Center will utilize 45,000 tons of structural steel, the equivalent of 22,500 full-size passenger cars. Recognized New York City buildings, the Empire State Building and the Chrysler Building, utilized 60,000 tons and 20,961 tons respectively.



PROJECT PARTICULARS

- The PATH Station and Transit Hall will be 300,000 sq. ft. (not including north/south and east/west corridors).
- Hub to feature 500,000 sq. ft. of retail and restaurant space.
- Designed by renowned architect Santiago Calatrava.
- Hub will serve more than 100,000 daily commuters along with millions of annual visitors to the World Trade Center and Memorial.
- The most integrated network of underground pedestrian connections in all of New York City: linking PATH service, 13 different subway lines, the Battery Park City Ferry Terminal to the WTC Memorial, Towers 1, 2, 3, and 4, and the World Financial Center.
- An enhanced level of security for those who travel through the Hub, including \$591 million worth of security infrastructure.

WTC Transportation Hub

The WTC Transportation Hub will restore and enhance the level of services that existed prior to September 11, 2001. The Hub will feature climate-controlled platforms and mezzanines with superior lighting and finishes. Commuters and visitors will be able to choose from a range of retail services, and make seamless transit connections using the Hub's fully integrated concourse, which will provide pedestrian access between the World Financial Center Winter Garden, PATH and the MTA New York City Transit's Fulton Street Transit Center.

MONTHLY HIGHLIGHTS

Most recently, the PATH Station's Super Column sections are being positioned and welded. DCM, the contractor, has rapidly set up tents and robust welding operations in the East Bathtub to prepare these hefty columns for permanent installation.

CONSTRUCTION PROGRESS

PATH Hall/Transit Hall

Over 225 of the nearly 300 pieces of steel that make up the PATH Hall roof have been installed, some weighing over 100 tons each. This steel forms the signature Calatrava arches that will be the defining grandeur of the station. Installation of the first two sections of the east box girder has also been accomplished. This massive steel member, when completed, will be over 1,900 tons and support the #1 subway line as it passes over the pedestrian access between the PATH Hall and Transit Hall.

Most recently, the PATH Station's Super Column sections are being positioned and welded. DCM, the contractor, has rapidly set up tents and robust welding operations in the East Bathtub to prepare these hefty columns for permanent installation.

Greenwich Street Corridor (Top-Down Construction)

All three levels have been successfully excavated and concrete slabs and walls have been placed on all levels. Later this quarter, major pieces of the invert slab will be placed. This concrete slab, which sits only inches below the existing #1 subway line, is the last major structural piece to be installed prior to the permanent load transfer.

Route 9A

Within Zone 1, Phoenix formed exterior bulkheads for the roof slab pour, installed ceiling inserts and bulkhead rods, and banded and installed rebar for the roof slab. For Zone 2, Phoenix drilled and installed rods for the liner wall at the North Projection.

Brookfield/Turner completed drilling and grouting of mini piles at the north and south locations within Zone 3. Within Zone 4, Brookfield/Turner continued the tangent pile operation under the crane trestle and northeast under the east duct bank. The contractor continued installing lagging and bracing. Within Zone 5, concrete continues to cure and blankets remain on walls to maintain the temperature within Zone 5.

East Basement Foundations

EIC, the foundations contractor, continues to install rock anchors and footings. To date, 44 rock anchors have been installed and six footings and one shear wall have been completed.



SPECIAL FEATURES


- There are two types of specially designed arches supporting the East-West Connector: Type "A" arches weigh 25 tons; Type "B" arches weigh 10 tons.
- The arches reach upward over 30 ft.



Fun Facts

Amount of steel to build the Hub (over 22,000 tons) is equal to the weight of the USS New York or roughly twice the steel used to build the new Yankee Stadium.

Just how far has public transit come in New York City? The first subway was opened in October of 1904 and was 9 miles long – today it's 842 miles. New York City rates fourth in the world by ridership with 1.6 billion riders per year.

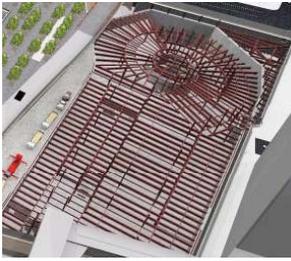

PROJECT PARTICULARS

- Scheduled to open in 2012.
- The VSC will be the checkpoint through which vehicles heading for the WTC's underground roadways and delivery points will pass.
- There will be approximately 50 spaces for tour bus parking.

Vehicular Security Center

The World Trade Center Vehicular Security Center and Tour Bus Parking Facility (VSC) will offer visitors, business tenants, and lower-Manhattan residents, a state-of-the-art facility with their safety and security as the foremost concern. The VSC is a below-grade structure that will be used to screen buses, trucks and cars entering the World Trade Center (WTC) site and its wide-array of facilities. In addition, the VSC will connect to an underground roadway system that will serve all of the office towers within the WTC site.

MONTHLY HIGHLIGHTS

The VSC soil excavation and tie back installation in the western part of the site is complete. The next contractor, Yonkers, has mobilized onto the site to begin rock excavation and foundation endeavors.

CONSTRUCTION PROGRESS

The contractor has finished the soil excavation and tie back installation in the western portion of the site. Utilizing as many as 160 trucks per day, workers have hauled away more than 50,000 cubic yards of soil from the site and installed over 200 tie backs.



Yonkers Construction has now mobilized on site to begin the rock excavation and foundation work in preparation for the structural steel which is currently being fabricated.



Our team is currently coordinating with the Lower Manhattan Development Corporation (LMDC) to start early-action construction activities in the eastern portion of the project, prior to the complete turn over of the 130 Liberty Street site, which is now targeted for complete deconstruction later this month.

SPECIAL FEATURES

- Structural redundancy, enhanced fireproofing, and extra-wide pressurized stairs
- Enhanced Security and Structural Integrity: Since ground water is close to the surface at the location of the VSC, foundation walls called slurry walls are being constructed. These walls isolate the excavated area from the surrounding soil and prevent water infiltration. The slurry walls are being constructed in a panel configuration composed of 29 panels.
- Innovative Panel Installation for Bathtub Walls: 29 interconnected concrete panels will form the basement, or "bathtub," walls. These panels are 22 feet wide, by 3 feet thick, by 65 feet deep. They are created by digging a hole in the ground for a panel, placing a reinforcing steel cage in the hole, and finally filling the hole with concrete. Each rebar cage weighs approximately 25 tons.
- A Comprehensive and Challenging Logistics Plan: The panel wall operation requires close coordination with NYSDOT's Route 9A project, the National September 11 Memorial and Museum, and with access roads into the 130 Liberty Street deconstruction project.
- State-of-the-Art Construction Machinery with our Neighbors in Mind: World Trade Center Construction utilizes state-of-the-art equipment to dig, drill and erect as quickly as possible. Contractors are also required to retrofit construction equipment in order to mitigate noise in the surrounding community.

Fun Fact

The weight of the steel reinforcing bars used in the VSC foundation walls is equivalent to 1/10th of the total weight of the Eiffel Tower.

10,701 tons of structural steel.

700 tons of reinforcing steel at slurry walls.

Each rebar cage weighs approximately 25 tons.



WTC Towers 2, 3 and 4

TOWER 2

Located at 200 Greenwich Street, this tower incorporates World Trade Center (WTC) site master planner Daniel Libeskind's "wedge of light" concept, and will cast no shadow on the Memorial Park on September 11. Tower 2 will feature a glazed crystalline form and a diamond-shaped summit. Designed by architectural firm Foster and Partners, the 79-story tower will be the second-tallest skyscraper on the WTC site and in New York City. Located east of the proposed performing arts center and north of the WTC Transportation Hub, Tower 2 will rise to 1,270 feet and be topped by an 80-foot antenna.

The tower will consist of a central concrete core - steel encased in reinforced concrete - and an external structural steel frame. Safety systems will exceed New York City (NYC) building code and Port Authority of New York and New Jersey (PA) requirements.

TOWER 3

Located at 175 Greenwich Street, the tower's corners are column-free, to provide unobstructed panoramic 360 degree views. Tower 3 will be the third-tallest building on the WTC site. Designed by Richard Rogers of Rogers Stirk Harbour + Partners, the tower will be situated at the center of the various buildings around the Memorial. The 71-story tower will rise 1,140 feet above street level and include 2.47 million rentable square feet of office space spread across 54 floors and five trading floors.

The tower will consist of a central concrete core - steel encased in reinforced concrete - and be clad in an external structural steel frame. Safety systems are planned to exceed NYC building code and PA requirements.

TOWER 4

Located at 150 Greenwich Street, the tower's minimalist, angular design completes the WTC master plan's descending spiral to the Memorial. Tower 4 will face directly onto the WTC Memorial Park from the west. Rising 975 feet, it will be the fourth-tallest skyscraper on the WTC site. Designed by Maki and Associates, the 64-story tower is intended to assume an understated but dignified presence at the site while also serving to enliven the urban environment as part of the redevelopment efforts.

The building will feature many structural enhancements, including a reinforced concrete core and columns with steel girders and beams. Safety systems will be designed to exceed NYC building code and PA requirements.

CURRENT CONSTRUCTION STATUS

Construction is currently ongoing on Tower 4. The layout of foundations and footings for Tower 2 and Tower 3 has begun.



PROJECT PARTICULARS

- Tower 2: 79-story tower (1270 feet tall) and 2.4 million square feet
- Tower 3: 71-story tower (1140 feet tall) and 2.0 million square feet
- Tower 4: 64-story tower (975 feet tall) and 1.8 million square feet





PROJECT PARTICULARS

- The Central Chiller Plant (CCP) will utilize cool river water of up to 30,000 gallons a minute to cool and dehumidify air in the Memorial and Museum, the Shopping Concourses, the Vehicular Security Checkpoints, and the Performing Arts Center.
- Water discharged back into the river will not exceed 91 degrees Fahrenheit.
- The energy performance of the CCP will support its stakeholder's commitments to attain a level of energy efficiency that is at least 20% higher than the currently effective energy code.



Central Chiller Plant



WTC Infrastructure & Related Projects

THE CENTRAL CHILLER PLANT

The Central Chiller Plant (CCP) is a 12,500-ton capacity system designed to provide air conditioning to the WTC Transportation Hub, National September 11 Memorial & Museum, retail space and other non-commercial areas. Located roughly in the same location as the pre-9/11 chiller plant, the CCP will use Hudson River water to make chilled water for distribution to these areas. In addition to the construction of the CCP itself, the scope of this program includes the renovation of the existing River Water Pump Station (RWPS) and the construction of the chilled water distribution system.

STREETS, UTILITIES & RELATED INFRASTRUCTURE PROJECTS

The Downtown Redevelopment Program encompasses creating and reconfiguring streets and rights-of-way, street lighting, public spaces and landscaped park areas, as well as creating new sidewalks and traffic controls. The redevelopment also calls for infrastructure modifications to essential systems such as storm drainage, domestic water, sanitary sewers and fire protection. This scope-of-work facilitates the needs of various projects within the program.

PERFORMING ARTS CENTER


The Performing Arts Center (PAC) is included as part of the master plan and is in the early planning stages. The PAC will be located at the northwest corner of Fulton and Greenwich Streets, where it is separated at grade from One World Trade Center by 60 feet. The center is anticipated to contain a 1000 seat auditorium, where it will be the permanent home of the Joyce Theater, a prestigious modern dance company.

CONSTRUCTION PROGRESS

The Central Chiller Plant is quickly taking shape, with all of the major equipment in place less than a year since construction began. In total, six chillers are in place totaling 13,500 tons of capacity and will be ready for testing in the 2nd Quarter. Across the West Side Highway, work is well underway in the River Water Pump House, which will serve as the main entry point for the Hudson River which provides the plant's main water supply.

The Streets Team is progressing with Con-Ed with the steam main installation at Liberty and Greenwich Streets and excavation is completed. Coordination of the sewer work on South Greenwich between Liberty and Cedar Streets with ECS, Con-Ed and Logistics continues. Phase II 100% final design Package 1 documents for Greenwich and Liberty Streets, adjacent to the Memorial, is being reviewed and compiled. Coordination of the duct bank work on Greenwich Street adjacent to T4 with ECS continues. The Liberty Park 100% Preliminary Engineering is being prepared for distribution

Last year, Mayor Michael R. Bloomberg, Governor David A. Paterson, and Assembly Speaker Sheldon Silver announced an agreement to create a \$100 million fund for the Performing Arts Center at the World Trade Center Site with federal funds directed to Lower Manhattan. This agreement will help finalize details regarding infrastructure and program design going forward.

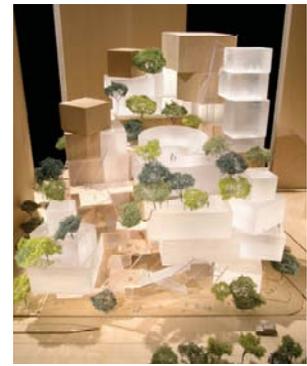

Model of Performing Arts Center

SPECIAL FEATURES

- Life Expectancy: The Chiller Plant has been designed to have a service life expectancy of 100 years.

Fun Fact

The chiller plant will circulate enough river water every minute sufficient to fill 750 bath tubs or flush 10,000 toilets.



The Original World Trade Center

In the 1940s and 1950s, midtown Manhattan was bustling with commerce, while lower Manhattan was very much underutilized. To encourage revitalization of downtown New York City, banker and real estate developer David Rockefeller created the Downtown Lower Manhattan Association in 1959.

The following year, Mr. Rockefeller presented a visionary plan to develop a new world trade and finance center along the East River. The Port Authority of New York and New Jersey carefully reviewed the plan and subsequently issued a positive report on the feasibility of developing a new world trade center in lower Manhattan.

Since the Port Authority required consensus from both New York and New Jersey, it was decided in 1962 to move the new world trade center to the west side of Manhattan. This decision provided more easy access for New Jersey commuters who utilized business facilities via the Hudson & Manhattan (H&M) Railroad lines. As part of the agreement, the Port Authority acquired H&M Railroad, now known as PATH.

PROJECT PARTICULARS

- 1 WTC was completed in December 1970 and 2 WTC was finished in July 1971.
- 13.4 million square feet of office space.
- In addition to the twin towers, other buildings included the Marriott World Trade Center; 6 World Trade Center (the United States Customs Office); and 7 World Trade Center.
- About 50,000 people worked in the towers with about 200,000 visitors.
- The WTC site was so immense that it had its own zip code: 10048.
- 7 World Trade Center, which was 47-stories, was completed in the 1980s in the northern area of the site.

Construction began on the North Tower in 1968 and on the South Tower in 1969. A "bathtub" was built with a slurry wall along the West Street side of the site, eliminating the infiltration of water from the Hudson River.



During the early 1960s, the Port Authority selected architect Minoru Yamasaki to design the original World Trade Center. His designs were unveiled to the public in January 1964. Once home to the Windows of the World restaurant, located in the North Tower, and the Top of the World Observation Deck, located in the South Tower, the twin towers were completed in the early 1970s, with an official ribbon cutting ceremony taking place on April 4, 1973.

Firms behind the original Twin Towers included: Worthington, Skilling, Helle & Jackson for Structural Engineering; the Port Authority Engineering Department for Foundation Engineering; Joseph R. Loring & Associates for Electrical Engineering; Jaros, Baum & Bolles for Mechanical Engineering; and Tishman Realty & Construction Company as the General Contractor.

SPECIAL FEATURES

- **Tube-Frame Design:** Introduced by Fazlur Khan, this design approach allowed open floor plans rather than columns distributed within the interior to support building loads.
- Vierendeel trusses were spaced closely together to offer high strength support.
- The twin towers featured narrow office windows, which were only 18 inches wide.
- The building facades were sheathed in aluminum alloy.

Fun Facts

In October of 1970, the North Tower of the WTC exceeds the height of the Empire State Building, making it the tallest building in the world.

The final scene of the 1976 version of the King Kong film took place at the World Trade Center.

Phillippe Petit performs an unauthorized tightrope feat walking between the Twin Towers on April 7, 1974.



WHAT IS LEED?

Developed by the U.S. Green Building Council, Leadership in Energy and Environmental Design or LEED is an internationally recognized green building certification system, providing third-party verification that a building or community was designed and built using strategies aimed at improving performance across all the metrics that matter most: energy savings, water efficiency, CO2 emission reduction, improved indoor environmental quality, and stewardship of resources and sensitivity to their impacts.

Learn more about the U.S. Green Building Council at: www.usgbc.org



Site Sustainability

With sustainability a vital factor in real estate development, the Port Authority of NY & NJ in conjunction with its stakeholders, have established the Sustainable Design Guidelines (SDG) - one of the most comprehensive sustainable criteria established to date. Realizing the immense scale of the project, the guidelines not only address the structures individually but also take into account the integration of each component and the site's overall impact on the environment. Combining the U.S. Green Building Council's LEED® Green Building Rating System™ with other urban scale/mixed used sustainable metrics, the guidelines go beyond the traditional models for green construction with the purpose of establishing a new level of sustainable quality for an urban model and identifying the pathways to higher performance over time.

KEY ELEMENTS

Four key elements are unique to the Guidelines:

- 1) Urban Environmental Quality – Attention to the sustainable qualities that the redevelopment site brings to the surrounding community and urban context of Downtown Manhattan
- 2) Whole System Compliance – Custom tailored guidelines for each development which integrate and overlap other project elements
- 3) Flexible Range of Options – Individual projects can draw from a large list of metrics all with a flexible range of scale
- 4) Integration of Building Design & Tenant Construction – Recognize the importance of integration of core and shell construction with tenant fit-out to capture maximum performance potentials

OBJECTIVES

In order to implement the Guidelines at the WTC Site, key objectives were developed to focus on the major components of sustainable design. Through proactive management plans and conservation initiatives, the objectives address critical measures of environmental requirements. In addition, awareness of the construction environment also plays a crucial role. The plans and initiatives focus on the following:

- Management Plans: Daylight/Solar Resources, Water Quality & Conservation, and Air Quality
- Conservation Initiatives: Energy and Materials

ALTERNATIVE COMPLIANCE PATH

As an additional measure of flexibility, compliance with the SDG's will also be satisfied through the Alternative Compliance Path. Some of the requirements include:

- Achievement of a LEED Gold certification from the U.S. Green Building Council
- Achievement of Net Zero CO2 for all base building electricity consumption
- Reduce Whole Building energy consumption 20% below NY State Energy Code Requirements



SITE DEVELOPMENTS

Conforming to the Sustainable Design Guidelines will be:

- Transportation Hub
- Vehicular Security Center
- Central Chiller Plant

Conforming to the Alternative Compliance Path will be:

- One World Trade Center
- The 9/11 Memorial
- Towers 2, 3 and 4



Original WTC antenna that was once atop Tower 1.

HUDSON RIVER BULKHEAD

The Hudson River Bulkhead (HRB), on the west side of Route 9A, is eligible for listing on the State and National Register of Historic Places. Acknowledging this distinction and the reality that this resource would be impacted by construction activity at the WTC Transportation Hub, an Archaeological Resource Monitoring, Treatment and Mitigation Plan and a NYS Museum permit application was prepared, submitted, and approved in accordance with the Memorandum of Agreement.

Preserving History at the World Trade Center

The original World Trade Center complex (WTC) consisted of seven buildings and six below-ground levels, spread across approximately 16 acres. 1 WTC and 2 WTC were the Twin Towers (north and south respectively); 3 WTC was the Marriott Hotel; 4 and 5 WTC were low-rise commercial office buildings; and 6 WTC, which served as the U.S. Customs House.

PROJECT PARTICULARS

- Scores of people raced down the Survivor Stairs to flee the World Trade Center attacks. The stairs once led down to Vesey Street from the Austin J. Tobin Plaza of the original World Trade Center.
- The Survivor Stairs is the only above-ground remnant of the Trade Center complex. The 5-foot wide, 37-step remnant will be showcased along side the main steps leading into the Museum. This 14,000 lb. remnant still has some of the top steps clad in granite.
- The Survivor Stairs provided a viable means of egress because they could be reached by walking alongside 6 World Trade Center, the U.S. Custom House, which had deep overhanging eaves that protected people fleeing the North Tower from falling debris and bodies.
- The Survivor Stairs remnant was relocated to an interim location at the WTC site in the area of the Memorial on March 9, 2008.

Hudson River Bulkhead



Survivor Stairs to be showcased in the future Museum.

SPECIAL FEATURES

- Part of the Hudson River Bulkhead, approximately a 62-foot section, has been removed to allow construction of an underground passageway between the World Trade Center and the World Financial Center.

Fun Facts

The Hudson River Bulkhead was proposed in 1870 and took 60 years to construct. This engineering feat of the time runs from Battery to 59th Street. The structure, which made the ports of New York dependable to navigation, was the brainchild of General George B. McClellan, chief engineer of the City's Department of Docks – yes, the General George B. McClellan that once led the Union troops. The section that parallels the WTC site was built between 1899 – 1915.

As late as 1910, no railroad coming from the South or the West had a direct connection to New York City. Construction of the tubes running under lower Manhattan, the "Montgomery – Cortlandt Tunnels" began in 1902. These twin tubes were 5,976 feet long and were 92 feet below the river. Each tube had a diameter of 15 feet, 3 inches. Successful construction of these tubes utilized tubular cast iron construction. The tubes were an engineering marvel of the day; the first transportation tunnel under a major river – even pre-dating both those of the New York Subway system and the Pennsylvania Railroad's entry into Manhattan.



Original 9/11 PATH Cars in Storage

SPECIAL FEATURES

- The Port Authority acknowledges historic structures adjoining the WTC site. Fully acknowledging these adjacencies and their significance, the Port Authority and its contractors have maintained a program of vibration monitoring at locations near these historic properties.



Original PATH Station

Preserving History at the World Trade Center Continued...

CONSTRUCTION PROGRESS

- The Port Authority worked cooperatively with the State Historic Preservation Offices (SHPO) and the Lower Manhattan Emergency Preservation Fund (LMEPF), in accordance with The Lower Manhattan Development Corporation's (LMDC's) Final Mitigation Plan for Adverse Effects on the Vesey Stair Remnant, to develop the methodology for an intact move of the Survivor Stairs (remnant).
- The Port Authority continues to follow the requirements for protection of cultural and histories resources as described in the project Memorandum of Agreement (MOA) and, further described in the project Resource and Protection and Construction Protection Plans that involve a project history architect.
- Monthly site visits and reports are performed to address compliance with Environmental Performance Commitments (EPCs) for cultural and historical resources. The periodic site visits consist of inspecting the protection of the Footprints (North & South Tower Column Remnants), the West Slurry Wall of the West Bathtub, the E-Line subway entrance, and the Survivor Stairs (Vesey Street Stair remnant) to assess if any maintenance is required.



Last column returns.



HUDSON AND MANHATTAN STRUCTURAL STEEL RINGS

As the Port Authority completed work to support or underpin the 1-Line Subway and remaining portions of the Hudson & Manhattan tubes were demolished, several sections of the iron rings were preserved and temporarily relocated to JFK Hangar, until the Museum is completed.



Rendering of original steel beams to be showcased in future Museum.

Fun Facts

April 4, 1909, marked the opening of the Hudson Terminal, the twin 22-story office buildings built over the terminal of the Hudson & Manhattan Railroad, located on the west side of Church Street between Cortlandt and Fulton Streets. Containing 815,000 square feet of office, this structure was proclaimed the world's largest office building at that time. Service in the Montgomery-Cortlandt Tunnels began on July 19, 1909.

Who was Austin J. Tobin (the namesake of the plaza for the original WTC)? Mr. Tobin joined the Port Authority in 1927, and devoted 45 years of service to the Port Authority. He served as Executive Director of the Port of New York Authority (precursor to the Port Authority of New York & New Jersey) from 1942 through 1972. Mr. Tobin oversaw the development of the original WTC.