


Awareness Advisory

Runway 24 Teterboro Five Departure

TO MAINTAIN SAFETY FLY THE TETERBORO FIVE DEPARTURE PRECISELY!

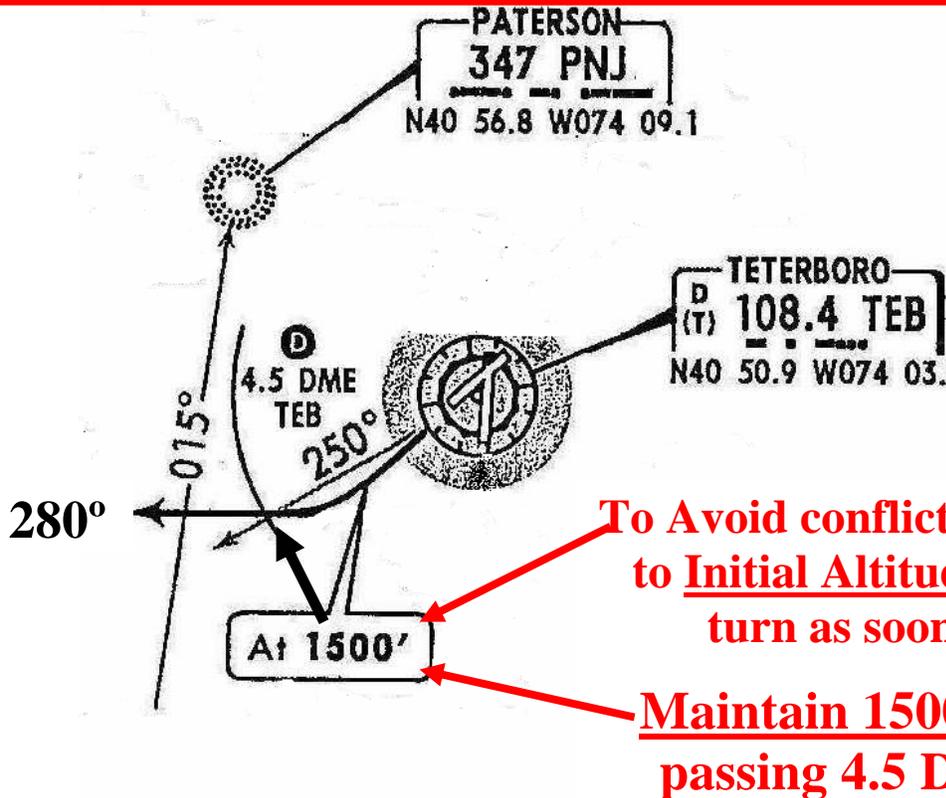

ADHERE TO ALL PRINTED PROCEDURE INSTRUCTIONS AND DO NOT DEVIATE UNLESS INSTRUCTED BY ATC!

RWY	INITIAL CLIMB	ALTITUDE
24	Climb runway heading until reaching 1500', then turn RIGHT heading 280°.	DME equipped aircraft: <u>MAINTAIN 1500'</u> until passing 4.5 DME TEB, then climb and MAINTAIN 2000' . NON-DME equipped aircraft: MAINTAIN 1500' until crossing PNJ 015° bearing, then climb and MAINTAIN 2000'

Suggest maximum take-off power to airport boundary (0.6 TEB DME) and then reduce to minimum climb power until reaching 1,500 feet MSL.